




## N11R AM

Industrial Connectors: Circular connectors NR-series: Panel-mounted connector

### Product description

Description	Panel-mounted connector with metal screw-in casing
Type	N11R AM
Order No.	932 626-106
Type of contact	male
Number of contacts	11 + PE
Conductor size	max. 0.5 mm <sup>2</sup>
Standard	DIN 43 651
Housing Color	grey

### Drawing

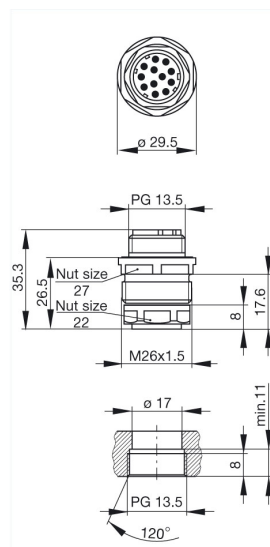

### Technical data

Pin dimensions	1.6 mm
Rated voltage	60 V AC/DC
Rated current	5 A
Contact resistance	<= 5 mOhm
Type of termination	crimp
Suitable cables	0.14 mm <sup>2</sup> to 0.5 mm <sup>2</sup>

### Material

Contact surface material	Ag
Contact bearer material	PET
Housing material	PET

### Environmental conditions

Protection class (IEC 60529)	IP 65
Temperature range	-40 °C to +90 °C

### Packing unit

Packaging unit	10 pieces
----------------	-----------

### Scope of delivery and accessories

Scope of delivery

1 panel-mounted connector, not assembled, in polythene bag with assembly instructions

Accessories to order separately

can be plugged into N11R FF, N11R EF;  
protective cover SHK 2,  
order no. 733 845-001  
contacts: RSC 162/1