

Product data sheet

Item No. R1.188.0640.0

Device for monitoring of safety-related circuits  
SNV4063KL-A 30S DC 24V (A)

Base unit, single-channel or two-channel control, automatic-/ manual Reset with Reset switch monitoring, 2 immediate switching current paths, 1 enabling current path off-delayed , 1.5s - 30s, DC 24 V, screw terminals pluggable



Item No.	R1.188.0640.0
EAN	4015573808782
Order Unit	1 Piece(s)

Certificates / Approvals



Technical data

General

Function display	3 LED, green
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire ranges screw terminals, fine-stranded / solid	1 x 0,2 mm <sup>2</sup> - 2,5 mm <sup>2</sup> / 2 x 0,2 mm <sup>2</sup> - 1,0 mm <sup>2</sup>
Wire ranges screw terminals, fine-stranded with ferrules	1 x 0,25 mm <sup>2</sup> - 2,5 mm <sup>2</sup> / 2 x 0,25 mm <sup>2</sup> - 1,0 mm <sup>2</sup>
Permissible torque min.	0.5 Nm
Permissible torque max.	0.6 Nm
Tightening moment	0.6 Nm
Weight	0.2 kg
Standards	EN ISO 13849-1EN 62061EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes

Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

**Connection Data**

Detachable clamps	Yes
Type of electric connection	Screw connection

**Application**

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

**Output circuit**

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Max. thermal current I	6 A
Max. total current I <sup>2</sup> of all current path	5 A <sup>2</sup>
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 2A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A <sup>2</sup> s
Mechanical life	10 <sup>7</sup> switching cycles
Outputs, signalling function, undelayed, with contact	0
Outputs, signalling function, delayed, with contact	0
Outputs, safe, undelayed, with contact	2
Outputs, safe, delayed, with contact	1

**Control circuit**

Nominal output voltage DC	22 V
Input current (safety circuit / reset circuit)	25 mA
max. peak current (safety circuit / reset circuit)	2500 mA
Response time tA1	30 ms
Response time tA2	700 ms
Min. switch-on time	200 ms
Recovery time tW	> 500 ms
Release time tR	< 25 ms
Release time tR, delayed contacts (tolerance)	1,5 -30 s (+ 16 %)
Synchronous time tS	leer 500 ms
Permissible test pulse time tTP	< 1 ms
max. resistivity, per channel	# (5 + (1,176 x UB / UN - 1) x 100) #
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

**Supply circuit**


Nominal voltage U	DC 24 V
Rated consumption DC	2.6 W
Electrical isolation supply circuit - control circuit	No
Min. rated DC voltage for controls	20.4 V
Max. rated DC voltage for controls	26.4 V
Min. rated control supply voltage at DC	20.4 V

**Dimensions**

Depth	114 mm
Width	22.5 mm
Height	96.5 mm

**Technical drawing**

Teile Nr. / Part No.	Teile Nr. / Part No.
R1.188.0460.0	R1.188.1840.0
R1.188.0470.0	R1.188.1850.0
R1.188.0480.0	R1.188.1860.0
R1.188.0490.0	R1.188.1870.0
R1.188.0500.1	R1.188.1880.0
R1.188.0530.1	R1.188.1890.0
R1.188.0590.0	R1.188.1900.0
R1.188.0620.0	R1.188.1910.0
R1.188.0640.0	R1.188.1920.0
R1.188.0660.0	R1.188.1930.0
R1.188.0680.0	R1.188.3250.0
R1.188.0700.2	R1.188.3290.0
R1.188.0720.2	R1.188.3360.0
R1.188.0900.1	R1.188.3480.0
R1.188.0910.1	R1.188.3580.0
R1.188.0940.1	R1.188.3590.0
R1.188.0950.1	R1.188.3620.0
R1.188.0990.0	R1.188.3640.0
R1.188.1000.0	R1.188.3660.0
R1.188.1010.0	R1.188.3710.0
R1.188.1050.0	R1.188.3810.0
R1.188.1060.0	R1.188.3830.0
R1.188.1070.0	R1.188.3840.0
R1.188.1120.0	R1.188.3910.0
R1.188.1280.0	R1.188.3930.0
R1.188.1340.0	R1.188.4020.0
R1.188.1440.0	R1.188.4100.0
R1.188.1450.0	R1.188.4110.0
R1.188.1460.0	R1.188.4120.0
R1.188.1480.0	81.030.0100.0
R1.188.1910.0	81.030.0101.0
R1.188.1820.0	81.030.0110.0
R1.188.1830.0	81.030.0111.0

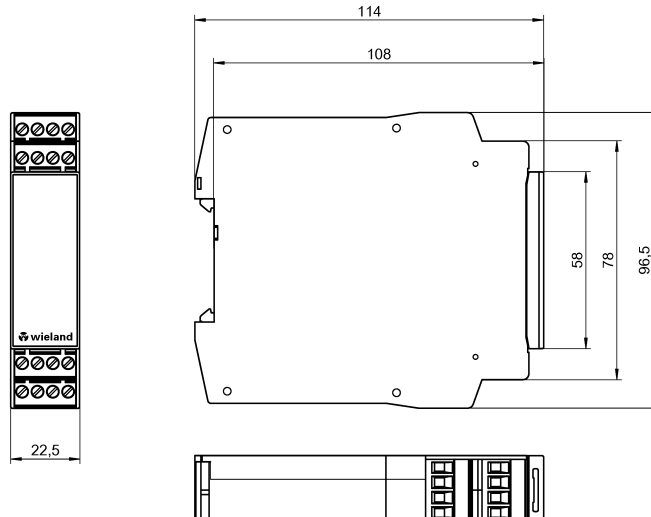

A 1  
 2  
 3  
 4  
 5  
 6  
 7  
 8  
 9  
 10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 M1  
 M2  
 M3  
 L  
 G  
 i  
 11.1  
 12.1  
 11

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog. [www.wieland-electric.com](http://www.wieland-electric.com) [eshop.wieland-electric.com](http://eshop.wieland-electric.com)

ja/yes  Stoffverbot- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freiolenz nach General tolerance	CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed	1. Verwendung: First Use:	Blatt: Sheet:										
<table border="1" style="width: 100%; font-size: 6px;"> <tr> <th>Werkstoff/ Material</th> <th>2014</th> <th>Tag/ Date</th> <th>Name</th> <th>Zeichnung Nr. / Drawing No.</th> </tr> <tr> <td></td> <td>06.06.</td> <td></td> <td>Kötzner</td> <td>T R1.188.0460.0 01K</td> </tr> </table>	Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.		06.06.		Kötzner	T R1.188.0460.0 01K	Maße in mm/Dimensions are in mm		
Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.									
	06.06.		Kötzner	T R1.188.0460.0 01K									
<table border="1" style="width: 100%; font-size: 6px;"> <tr> <th>Datei/ File:</th> <th>Ersetzt für/ Replacement for:</th> </tr> <tr> <td>030181_E01K.DCD</td> <td></td> </tr> </table>	Datei/ File:	Ersetzt für/ Replacement for:	030181_E01K.DCD		<table border="1" style="width: 100%; font-size: 6px;"> <tr> <th>Type</th> <th>Benennung/ Title</th> </tr> <tr> <td></td> <td>Maßbildzeichnung/dimension drawing Standvorgehäuse u. -deckel, Baubreite 22,5mm, Schraubenklammern steckbar standard housing and cover, overall with 22.5mm plug-in pcb terminal</td> </tr> </table>			Type	Benennung/ Title		Maßbildzeichnung/dimension drawing Standvorgehäuse u. -deckel, Baubreite 22,5mm, Schraubenklammern steckbar standard housing and cover, overall with 22.5mm plug-in pcb terminal		
Datei/ File:	Ersetzt für/ Replacement for:												
030181_E01K.DCD													
Type	Benennung/ Title												
	Maßbildzeichnung/dimension drawing Standvorgehäuse u. -deckel, Baubreite 22,5mm, Schraubenklammern steckbar standard housing and cover, overall with 22.5mm plug-in pcb terminal												

R1\_188\_0460\_001K\_2 CADW3072 Koetzner 2016-04-22T11:27:40 1.000