


## Product data sheet

Item No. R1.188.2320.0

### Device for monitoring of safety-related circuits SNV4074SL-C 3s AC 115-230V

Base unit, single-channel or two-channel control, automatic-/ manual reset with reset switch monitoring, 2 immediate switching current paths, 2 enabling current path off-delayed not retriggerable, 2 signalling contacts immediately, 2 signalling contacts off-delayed, 0 - 3s, AC 115-230 V, push-in terminals pluggable

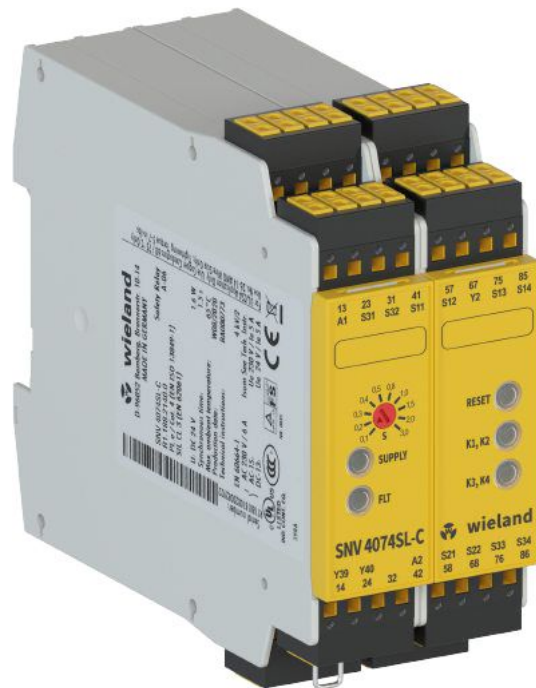

Item No.	R1.188.2320.0
EAN	4046521300614
Order Unit	1 Piece(s)

#### Certificates / Approvals



#### Technical data

##### General

Function display	5 LED, grün/rot
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire range cage clamp terminals	2 x 0,25mm <sup>2</sup> - 1,5mm <sup>2</sup>
Weight	0.35 kg
Standards	EN ISO 13849-1EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

##### Connection Data

Detachable clamps	Yes
Type of electric connection	Spring clamp connection

**Application**

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

**Output circuit**

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I <sup>2</sup> of all current path	25 A <sup>2</sup>
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 3A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A <sup>2</sup> s
Mechanical life	10 <sup>7</sup> switching cycles
Outputs, signalling function, undelayed, with contact	2
Outputs, signalling function, delayed, with contact	2
Outputs, safe, undelayed, with contact	2
Outputs, safe, delayed, with contact	2

**Control circuit**

Response time tA1	200 ms
Response time tA2	200 ms
Min. switch-on time	100 ms
Recovery time tW	> 50 ms
Release time tR	< 20 ms
Release time tR, delayed contacts (tolerance)	0,1 - 3 s (+- 0,1 %, +- 15ms)
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

**Supply circuit**

Nominal voltage U	AC 115-230 V
Rated consumption AC	6.3 VA
Electrical isolation supply circuit - control circuit	Yes
Min. rated control supply voltage at AC 50 Hz	98 V
Max. rated AC voltage for controls, 50 Hz	253 V
Rated control supply voltage at AC 60HZ	98 V
Rated control supply voltage at AC 50HZ	253 V

**Dimensions**


Depth	114 mm
Width	45 mm
Height	106.5 mm

## Technical drawing



04 - PRE 17/92

⊙

Teile-Nr. / Part-No.
R1.188.2050.0
R1.188.2080.0
R1.188.2110.0
R1.188.2140.0
R1.188.2170.0
R1.188.2200.0
R1.188.2230.0
R1.188.2260.0
R1.188.2290.0
R1.188.2320.0
R1.188.2350.0
R1.188.2380.0
R1.188.2480.0
R1.188.2510.0
R1.188.2540.0
R1.188.2570.0
R1.188.2600.0
R1.188.2630.0
R1.188.2660.0
R1.188.2690.0
R1.188.2720.0
R1.188.2750.0
R1.188.2780.0
R1.188.2810.0
R1.188.3540.0

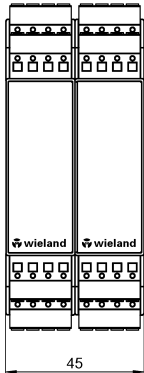

45

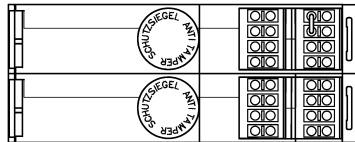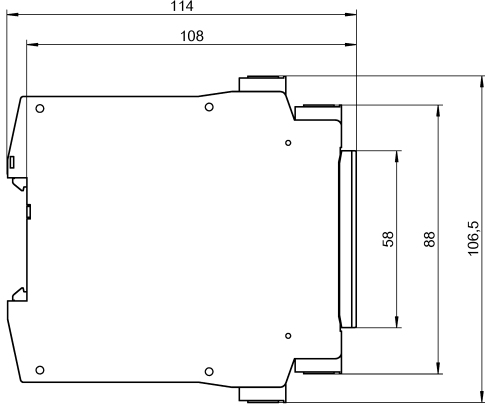A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
M1
M2
M3
L
C
I
11.1
12.1
13.1

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog. [www.wieland-electric.com](http://www.wieland-electric.com)  
[eshop.wieland-electric.com](http://eshop.wieland-electric.com)

ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared																					
Freioleranz nach General tolerance	CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed																				
Verwendung: First Use:	Blatt: Sheet:																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Werkstoff/ Material</th> <th>2014</th> <th>Tag/ Date</th> <th>Name</th> <th>Zeichnung Nr. / Drawing No.</th> </tr> <tr> <td> </td> <td>gezeichnet designed</td> <td>05.06.</td> <td>Koetznner</td> <td><b>T R1.188.3540.0 01K</b></td> </tr> <tr> <td> </td> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> <tr> <td> </td> <td>gezeichnet designed</td> <td></td> <td></td> <td></td> </tr> </table>	Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.		gezeichnet designed	05.06.	Koetznner	<b>T R1.188.3540.0 01K</b>		geprüft checked					gezeichnet designed				Maße in mm/Dimensions are in mm
Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.																	
	gezeichnet designed	05.06.	Koetznner	<b>T R1.188.3540.0 01K</b>																	
	geprüft checked																				
	gezeichnet designed																				
Detail/ File: 036021_001K_R1.188.3540.0.DCD																					
Ersetzt für/ Replacement for:																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Type</th> <th>Benennung/ Title</th> </tr> <tr> <td> </td> <td>Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Federkraftklemme steckbar, standard housing and cover, overall with 45mm plug-in spring-clamp terminal</td> </tr> </table>	Type	Benennung/ Title		Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Federkraftklemme steckbar, standard housing and cover, overall with 45mm plug-in spring-clamp terminal																	
Type	Benennung/ Title																				
	Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Federkraftklemme steckbar, standard housing and cover, overall with 45mm plug-in spring-clamp terminal																				

R1\_188\_3540\_001K\_2 CADW3072 Koetznner 2016-09-02T12:27:22 1.000