

Product data sheet

Item No. R1.188.2560.0

Device for monitoring of safety-related circuits SNV4074ST-A 3S DC 24V

Base unit, single-channel or two-channel control, automatic-/ manual reset with reset switch monitoring, 2 immediate switching current paths, 2 enabling current path on-delayed not retriggerable, 2 signalling contacts immediately, 2 signalling contacts off-delayed, 0 - 3s, DC 24 V, screw-terminals pluggable



Item No.	R1.188.2560.0
EAN	4046521303905
Order Unit	1 Piece(s)

Certificates / Approvals



Technical data

General

Function display	5 LED, grün/rot
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire ranges screw terminals, fine-stranded / solid	1 x 0,2 mm ² - 2,5 mm ² / 2 x 0,2 mm ² - 1,0 mm ²
Wire ranges screw terminals, fine-stranded with ferrules	1 x 0,25 mm ² - 2,5 mm ² / 2 x 0,25 mm ² - 1,0 mm ²
Permissible torque min.	0.5 Nm
Permissible torque max.	0.6 Nm
Tightening moment	0.6 Nm
Weight	0.33 kg
Standards	EN ISO 13849-1EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

Connection Data

Detachable clamps	Yes
Type of electric connection	Screw connection

Application

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

Output circuit

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I ² of all current path	40 A ²
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 3A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A ² s
Mechanical life	10 ⁷ switching cycles
Outputs, signalling function, undelayed, with contact	2
Outputs, signalling function, delayed, with contact	2
Outputs, safe, undelayed, with contact	2
Outputs, safe, delayed, with contact	2

Control circuit

Response time tA1	200 ms
Response time tA2	200 ms
Min. switch-on time	100 ms
Recovery time tW	> 50 ms
Release time tR	< 20 ms
Release time tR, delayed contacts (tolerance)	0,1 - 3 s (+- 0,1 %, + 15ms)
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

Supply circuit

Nominal voltage U	DC 24 V
Rated consumption DC	2.8 W
Electrical isolation supply circuit - control circuit	No
Min. rated DC voltage for controls	20.4 V
Max. rated DC voltage for controls	26.4 V
Min. rated control supply voltage at DC	20.4 V

Dimensions

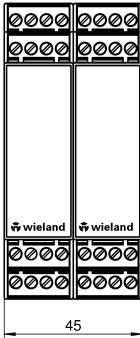
Depth	114 mm
Width	45 mm
Height	96.5 mm

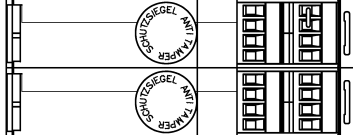
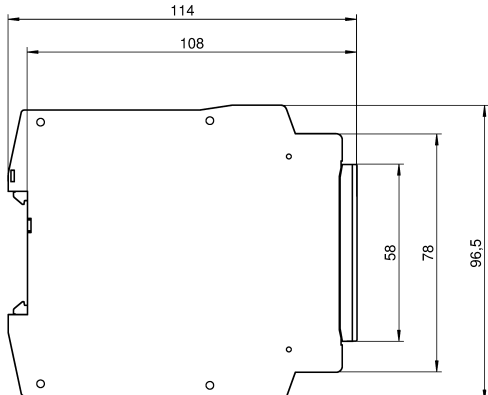
Technical drawing

00 - PRE 12/02

⊙


Teile-Nr. / Part-No.
R1.188.2040.0
R1.188.2070.0
R1.188.2100.0
R1.188.2130.0
R1.188.2160.0
R1.188.2190.0
R1.188.2220.0
R1.188.2250.0
R1.188.2280.0
R1.188.2310.0
R1.188.2340.0
R1.188.2370.0
R1.188.2470.0
R1.188.2500.0
R1.188.2530.0
R1.188.2560.0
R1.188.2590.0
R1.188.2620.0
R1.188.2650.0
R1.188.2680.0
R1.188.2710.0
R1.188.2740.0
R1.188.2770.0
R1.188.2800.0
R1.188.3120.0
R1.188.3510.0



Werte für die Abmessungen sind in mm angegeben. Die Maße sind ohne Gewähr. Die Abmessungen sind ohne Gewähr. Die Abmessungen sind ohne Gewähr.

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog. www.wieland-electric.com eshop.wieland-electric.com

ja/yes <input type="checkbox"/> Stoffverbots- und Deklarationsliste nach NN 5020.010 ist einzuhalten. Conformity with Wieland document NN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared																										
Freiheiten nach General tolerance	<input type="checkbox"/> CAD-Zeichnung, keine manuellen Änderungen <input type="checkbox"/> CAD-Drawing, no manual modifications allowed																									
Verwendung First Use:	Sheet:																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Werkstoff/ Material</th> <th>2014</th> <th>Tag/ Date</th> <th>Name</th> <th>Zeichnung Nr. / Drawing No.</th> </tr> </thead> <tbody> <tr> <td>Maßstab/Scale</td> <td>gezeichnet/created</td> <td>05.06.</td> <td>Kötzner</td> <td>T R1.188.3120.0 01K</td> </tr> <tr> <td></td> <td>geprüft/checked</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>geprüft/checked</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>geprüft/checked</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.	Maßstab/Scale	gezeichnet/created	05.06.	Kötzner	T R1.188.3120.0 01K		geprüft/checked					geprüft/checked					geprüft/checked				Maße in mm/Dimensions are in mm
Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.																						
Maßstab/Scale	gezeichnet/created	05.06.	Kötzner	T R1.188.3120.0 01K																						
	geprüft/checked																									
	geprüft/checked																									
	geprüft/checked																									
Detail/ File: 030021_A01K_R1.188.3120.0.DCD																										
Ersetzt für/ Replacement for:																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Index</th> <th>03.02.15</th> <th>Typ/ Type</th> <th>Benennung/ Title</th> </tr> </thead> <tbody> <tr> <td>Änderung/ Revision</td> <td>03.02.15</td> <td>Maßbildzeichnung/dimension drawing</td> <td>Standardgehäuse u. -deckel, Baubreite 45mm, Schraubklemmen steckbar</td> </tr> <tr> <td></td> <td></td> <td>standard housing and cover, overall with 45mm plug-in pcb terminal</td> <td></td> </tr> </tbody> </table>	Index	03.02.15	Typ/ Type	Benennung/ Title	Änderung/ Revision	03.02.15	Maßbildzeichnung/dimension drawing	Standardgehäuse u. -deckel, Baubreite 45mm, Schraubklemmen steckbar			standard housing and cover, overall with 45mm plug-in pcb terminal		 www.wieland-electric.com													
Index	03.02.15	Typ/ Type	Benennung/ Title																							
Änderung/ Revision	03.02.15	Maßbildzeichnung/dimension drawing	Standardgehäuse u. -deckel, Baubreite 45mm, Schraubklemmen steckbar																							
		standard housing and cover, overall with 45mm plug-in pcb terminal																								

R11883120001K_1 CADW3072 Koetzner 2015-02-04T14:01:36 1.00D
Creation date 27.05.2020
Technical changes reserved
Page 3/3