


**Product data sheet**

Item No. R1.188.2630.0

**Device for monitoring of safety-related circuits  
SNV4074ST-C 300S DC 24V**

Base unit, single-channel or two-channel control, automatic-/ manual reset with reset switch monitoring, 2 immediate switching current paths, 2 enabling current path on-delayed not retriggerable, 2 signalling contacts immediately, 2 signalling contacts off-delayed, 0 - 30s, DC 24 V, push-in terminals pluggable

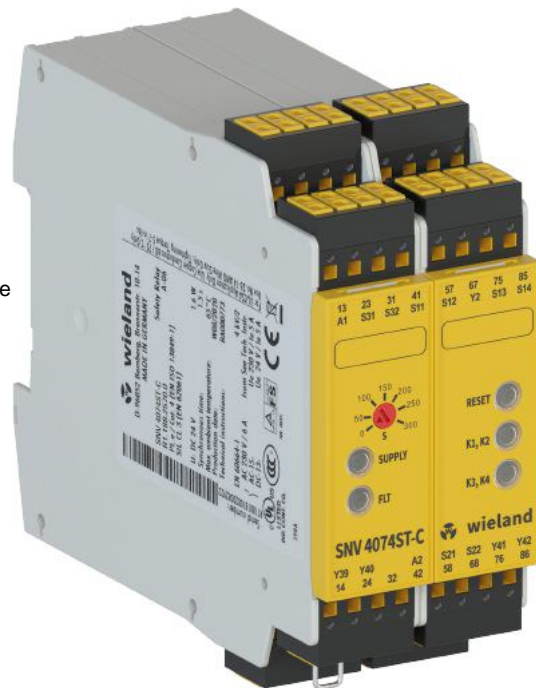

Item No.	R1.188.2630.0
EAN	4046521303974
Order Unit	1 Piece(s)

**Certificates / Approvals**

**Technical data**
**General**

Function display	5 LED, grün/rot
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire range cage clamp terminals	2 x 0,25mm <sup>2</sup> - 1,5mm <sup>2</sup>
Weight	0.33 kg
Standards	EN ISO 13849-1EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

**Connection Data**

Detachable clamps	Yes
Type of electric connection	Spring clamp connection

**Application**

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

**Output circuit**

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I <sup>2</sup> of all current path	40 A <sup>2</sup>
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 3A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A <sup>2</sup> s
Mechanical life	10 <sup>7</sup> switching cycles
Outputs, signalling function, undelayed, with contact	2
Outputs, signalling function, delayed, with contact	2
Outputs, safe, undelayed, with contact	2
Outputs, safe, delayed, with contact	2

**Control circuit**

Response time tA1	200 ms
Response time tA2	200 ms
Min. switch-on time	100 ms
Recovery time tW	> 50 ms
Release time tR	< 20 ms
Release time tR, delayed contacts (tolerance)	0 - 300 s (+- 0,1 %, +- 15ms)
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

**Supply circuit**

Nominal voltage U	DC 24 V
Rated consumption DC	2.8 W
Electrical isolation supply circuit - control circuit	No
Min. rated DC voltage for controls	20.4 V
Max. rated DC voltage for controls	26.4 V
Min. rated control supply voltage at DC	20.4 V

**Dimensions**


Depth	114 mm
Width	45 mm
Height	106.5 mm

## Technical drawing

04 - PRE 17/92

⊙

Teile-Nr. / Part-No.
R1.188.2050.0
R1.188.2080.0
R1.188.2110.0
R1.188.2140.0
R1.188.2170.0
R1.188.2200.0
R1.188.2230.0
R1.188.2260.0
R1.188.2290.0
R1.188.2320.0
R1.188.2350.0
R1.188.2380.0
R1.188.2480.0
R1.188.2510.0
R1.188.2540.0
R1.188.2570.0
R1.188.2600.0
R1.188.2630.0
R1.188.2660.0
R1.188.2690.0
R1.188.2720.0
R1.188.2750.0
R1.188.2780.0
R1.188.2810.0
R1.188.3540.0

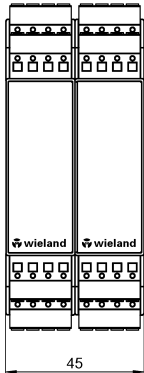

Weitere Angaben siehe KATALOG oder eKatalog.  
 Additional data see CATALOG or eCatalog.

[www.wieland-electric.com](http://www.wieland-electric.com)  
[eshop.wieland-electric.com](http://eshop.wieland-electric.com)

ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared	
Freioleranz nach General tolerance	CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed
Verwendung: First Use:	Sheet:
Werkstoff/ Material 2014 gezeichnet drawn 05.06. Koetznner Maßstab/Scale Zeichnung Nr. / Drawing No. <b>T R1.188.3540.0 01K</b> Maße in mm/Dimensions are in mm	Datei/ File: 036021_001K_R1.188.3540.0.DCD Ersatz für/ Replacement for:
02.09.16 03.02.15 Index Änderung/ Revision	Type Benennung/ Title Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Federkraftklemme steckbar, standard housing and cover, overall with 45mm plug-in spring-clamp terminal

A  
1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
M1  
M2  
M3  
L  
C  
I  
11.1  
12.1  
13.1