

Product data sheet

Item No. R1.188.3850.0


Device for monitoring of safety-related circuits SNO 4083KM-C 0,5s_DC 24V

Base unit also for elevators EN 81-20/50 and heaters EN50156-1 single- channel or two-channel control, manual reset with reset switch monitoring, cross circuit monitoring, synchronous time 0.5s, 3 enabling current paths, 1 signalling output, DC 24 V, push-interminals pluggable



Item No.	R1.188.3850.0
EAN	4049088159404
Order Unit	1 Piece(s)

Certificates / Approvals



Technical data

General

Function display	3 LED, green
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	65 °C
Permissible torque min.	0.5 Nm
Permissible torque max.	0.6 Nm
Tightening moment	0.6 Nm
Wire range cage clamp terminals	2 x 0,25mm ² - 1,5mm ²
Weight	0.2 kg
Standards	EN ISO 13849-1EN 62061, EN 81-1EN 50156-1EN 62061EN 81-1EN 50156-1
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes

Start contact	Yes
Stop category acc. to IEC 60204	0
Rail mounting possible	Yes

Connection Data

Detachable clamps	Yes
Type of electric connection	Spring clamp connection

Application

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

Output circuit

Enabling paths	Normally open contact
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I ² of all current path	25 A ²
Application category AC-15 (NO)	Ue 230V, Ie 5A
Application category DC-13 (NO)	Ue 24V, Ie 5A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A ² s
Mechanical life	10 ⁷ switching cycles
Outputs, signalling function, undelayed, with contact	1
Outputs, safe, undelayed, with contact	3

Control circuit

Nominal output voltage DC	22.5 V
Input current (safety circuit / reset circuit)	25 mA
max. peak current (safety circuit / reset circuit)	100 mA
Response time tA1	250 ms
Response time tA2	250 ms
Min. switch-on time	60 ms
Recovery time tW	leer 120 ms
Release time tR	leer 20 ms
Synchronous time tS	leer 0.5 s
Permissible test pulse time tTP	< 0.8 ms
max. resistivity, per channel	# (5 + (1,176 x UB / UN - 1) x 100) #
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

Supply circuit

Nominal voltage U	DC 24 V
Rated consumption DC	1.6 W
Operating voltage min.	20.4 V
Operating voltage max.	28.8 V
Electrical isolation supply circuit - control circuit	No

Dimensions


Depth	114 mm
-------	--------

Width	22.5 mm
Height	106.5 mm


Technical drawing

01 - SEE 12/22

Teile Nr. / Part No.	Teile Nr. / Part No.
R1.188.1940.0	R1.188.3610.0
R1.188.1950.0	R1.188.3630.0
R1.188.1960.0	R1.188.3650.0
R1.188.1970.0	R1.188.3670.0
R1.188.1980.0	R1.188.3730.0
R1.188.1990.0	R1.188.3820.0
R1.188.2000.0	R1.188.3850.0
R1.188.2010.0	R1.188.3860.0
R1.188.2020.0	R1.188.3900.0
R1.188.2390.0	R1.188.3920.0
R1.188.2410.0	R1.188.3940.0
R1.188.2420.0	R1.188.4000.0
R1.188.2430.0	R1.188.4010.0
R1.188.2440.0	R1.188.4030.0
R1.188.2450.0	R1.188.4130.0
R1.188.3400.0	R1.188.4140.0
R1.188.3410.0	R1.188.4150.0
R1.188.3420.0	R1.188.4160.0
R1.188.3430.0	R1.188.4210.0
R1.188.3490.0	R1.188.5000.0
R1.188.3600.0	

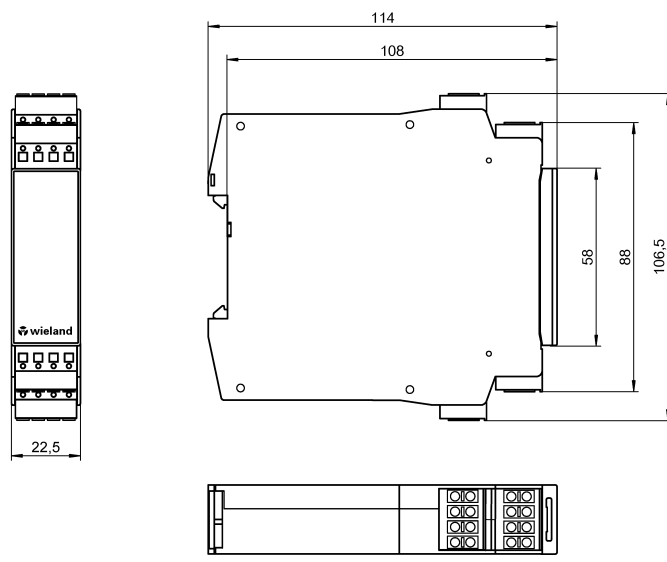

Weitere Angaben siehe KATALOG oder eKatalog. www.wieland-electric.com
 Additional data see CATALOG or eCatalog. eshop.wieland-electric.com

ja/yes <input type="checkbox"/> Stoffverbleis- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!		1. Verwendung: <input type="checkbox"/> Blatt: First Use: <input type="checkbox"/> Sheet:																		
Freioleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed																		
<table border="1" style="width: 100%;"> <thead> <tr> <th>2014</th> <th>Tag/Date</th> <th>Name</th> <th>Zeichnung Nr./Drawing No.</th> </tr> </thead> <tbody> <tr> <td>09.08.19</td> <td></td> <td></td> <td rowspan="4">T R1.188.1940.0 01K</td> </tr> <tr> <td>26.08.16</td> <td></td> <td>Koetznier</td> </tr> <tr> <td>22.04.16</td> <td></td> <td></td> </tr> <tr> <td>03.07.15</td> <td></td> <td></td> </tr> </tbody> </table>		2014	Tag/Date	Name	Zeichnung Nr./Drawing No.	09.08.19			T R1.188.1940.0 01K	26.08.16		Koetznier	22.04.16			03.07.15			Maße in mm/Dimensions are in mm	
2014	Tag/Date	Name	Zeichnung Nr./Drawing No.																	
09.08.19			T R1.188.1940.0 01K																	
26.08.16		Koetznier																		
22.04.16																				
03.07.15																				
Datei/File: 036141_F01K.DCD		Ersetzt für/Replacement for:																		
<table border="1" style="width: 100%;"> <thead> <tr> <th>2014</th> <th>Tag/Date</th> <th>Name</th> <th>Benennung/Title</th> </tr> </thead> <tbody> <tr> <td>09.08.19</td> <td></td> <td></td> <td rowspan="4">Maßbildzeichnung/Dimension drawing Standardgehäuse u. -deckel, Baubreite 22,5mm, Federkraftklemme steckbar Standard housing and cover, overall width 22,5mm plug-in spring-clamp terminal</td> </tr> <tr> <td>03.02.15</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </tbody> </table>		2014	Tag/Date	Name	Benennung/Title	09.08.19			Maßbildzeichnung/Dimension drawing Standardgehäuse u. -deckel, Baubreite 22,5mm, Federkraftklemme steckbar Standard housing and cover, overall width 22,5mm plug-in spring-clamp terminal	03.02.15										
2014	Tag/Date	Name	Benennung/Title																	
09.08.19			Maßbildzeichnung/Dimension drawing Standardgehäuse u. -deckel, Baubreite 22,5mm, Federkraftklemme steckbar Standard housing and cover, overall width 22,5mm plug-in spring-clamp terminal																	
03.02.15																				

R1_188_1940_001K_2 CADW4033 Koetznier 2019-08-09T13:43:25 1.000