

## Product data sheet

Item No. R1.188.2140.0

### Device for monitoring of safety-related circuits SNV4074SL-C 3S DC 24V

Base unit, single-channel or two-channel control, automatic-/ manual reset with reset switch monitoring, 2 immediate switching current paths, 2 enabling current path off-delayed not retriggerable, 2 signalling contacts immediately, 2 signalling contacts off-delayed, 0 - 3s, DC 24 V, push-in terminals pluggable



Item No.	R1.188.2140.0
EAN	4046521300225
Order Unit	1 Piece(s)

### Certificates / Approvals



### Technical data

#### General

Function display	5 LED, grün/rot
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire range cage clamp terminals	2 x 0,25mm <sup>2</sup> - 1,5mm <sup>2</sup>
Weight	0.33 kg
Standards	EN ISO 13849-1EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

#### Connection Data

Detachable clamps	Yes
Type of electric connection	Spring clamp connection

**Application**

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

**Output circuit**

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I <sup>2</sup> of all current path	40 A <sup>2</sup>
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 3A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A <sup>2</sup> s
Mechanical life	10 <sup>7</sup> switching cycles
Outputs, signalling function, undelayed, with contact	2
Outputs, signalling function, delayed, with contact	2
Outputs, safe, undelayed, with contact	2
Outputs, safe, delayed, with contact	2

**Control circuit**

Response time tA1	200 ms
Response time tA2	200 ms
Min. switch-on time	100 ms
Recovery time tW	> 50 ms
Release time tR	< 20 ms
Release time tR, delayed contacts (tolerance)	0,1 - 3 s (+- 0,1 %, +- 15ms)
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

**Supply circuit**

Nominal voltage U	DC 24 V
Rated consumption DC	2.8 W
Electrical isolation supply circuit - control circuit	No
Min. rated DC voltage for controls	20.4 V
Max. rated DC voltage for controls	26.4 V
Min. rated control supply voltage at DC	20.4 V

**Dimensions**


Depth	114 mm
Width	45 mm
Height	106.5 mm

## Technical drawing


04 - PRE 17/02


⊙

Teile-Nr. / Part-No.
R1.188.2050.0
R1.188.2080.0
R1.188.2110.0
R1.188.2140.0
R1.188.2170.0
R1.188.2200.0
R1.188.2230.0
R1.188.2260.0
R1.188.2290.0
R1.188.2320.0
R1.188.2350.0
R1.188.2380.0
R1.188.2480.0
R1.188.2510.0
R1.188.2540.0
R1.188.2570.0
R1.188.2600.0
R1.188.2630.0
R1.188.2660.0
R1.188.2690.0
R1.188.2720.0
R1.188.2750.0
R1.188.2780.0
R1.188.2810.0
R1.188.3540.0

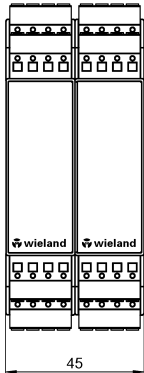

45

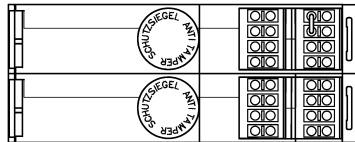

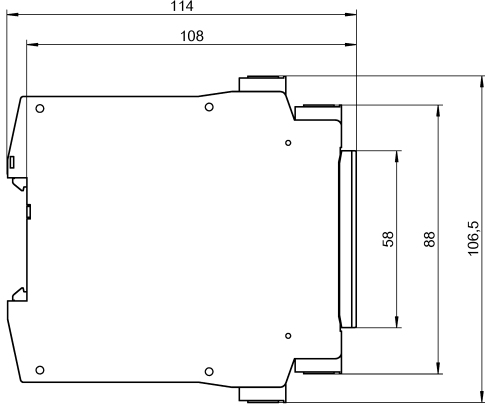


Werte dieser Zeichnung sind verbindlich und können ohne schriftliche Genehmigung der Wieland AG nicht weitergegeben werden. Änderungen sind nur durch einen entsprechenden Auftrag zu bewerkstelligen.

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog. [www.wieland-electric.com](http://www.wieland-electric.com)  
[eshop.wieland-electric.com](http://eshop.wieland-electric.com)

ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared																											
Freioleranz nach General tolerance	1. Verwendung First Use: <input type="checkbox"/> Blatt: Sheet:																										
<table border="1" style="width: 100%; font-size: 6px;"> <tr> <th>Werkstoff/ Material</th> <th>2014</th> <th>Tag/ Date</th> <th>Name</th> <th>Zeichnung Nr. / Drawing No.</th> </tr> <tr> <td> <table border="1" style="width: 100%; font-size: 6px;"> <tr> <td>gezeichnet/ drawn</td> <td>05.06.</td> <td>Koetznor</td> <td rowspan="4" style="text-align: center; vertical-align: middle;"><b>T R1.188.3540.0 01K</b></td> </tr> <tr> <td>geprüft/ checked</td> <td></td> <td></td> </tr> <tr> <td>gezeichnet/ drawn</td> <td></td> <td></td> </tr> <tr> <td>geprüft/ checked</td> <td></td> <td></td> </tr> </table> </td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="4">Maße in mm/Dimensions are in mm</td> </tr> </table>	Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.	<table border="1" style="width: 100%; font-size: 6px;"> <tr> <td>gezeichnet/ drawn</td> <td>05.06.</td> <td>Koetznor</td> <td rowspan="4" style="text-align: center; vertical-align: middle;"><b>T R1.188.3540.0 01K</b></td> </tr> <tr> <td>geprüft/ checked</td> <td></td> <td></td> </tr> <tr> <td>gezeichnet/ drawn</td> <td></td> <td></td> </tr> <tr> <td>geprüft/ checked</td> <td></td> <td></td> </tr> </table>	gezeichnet/ drawn	05.06.	Koetznor	<b>T R1.188.3540.0 01K</b>	geprüft/ checked			gezeichnet/ drawn			geprüft/ checked						Maße in mm/Dimensions are in mm				
Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.																							
<table border="1" style="width: 100%; font-size: 6px;"> <tr> <td>gezeichnet/ drawn</td> <td>05.06.</td> <td>Koetznor</td> <td rowspan="4" style="text-align: center; vertical-align: middle;"><b>T R1.188.3540.0 01K</b></td> </tr> <tr> <td>geprüft/ checked</td> <td></td> <td></td> </tr> <tr> <td>gezeichnet/ drawn</td> <td></td> <td></td> </tr> <tr> <td>geprüft/ checked</td> <td></td> <td></td> </tr> </table>	gezeichnet/ drawn	05.06.	Koetznor	<b>T R1.188.3540.0 01K</b>	geprüft/ checked			gezeichnet/ drawn				geprüft/ checked															
gezeichnet/ drawn	05.06.	Koetznor	<b>T R1.188.3540.0 01K</b>																								
geprüft/ checked																											
gezeichnet/ drawn																											
geprüft/ checked																											
Maße in mm/Dimensions are in mm																											
Detail/ File: 036021_001K_R1.188.3540.0.DCD																											
Ersetzt für/ Replacement for:																											
<table border="1" style="width: 100%; font-size: 6px;"> <tr> <th>Type</th> <th>Benennung/ Title</th> </tr> <tr> <td></td> <td>Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Federkraftklemme steckbar, standard housing and cover, overall with 45mm plug-in spring-clamp terminal</td> </tr> </table>	Type	Benennung/ Title		Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Federkraftklemme steckbar, standard housing and cover, overall with 45mm plug-in spring-clamp terminal																							
Type	Benennung/ Title																										
	Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Federkraftklemme steckbar, standard housing and cover, overall with 45mm plug-in spring-clamp terminal																										

02.09.16	
05.02.15	



www.wieland-electric.com

R1\_188\_3540\_001K\_2 CADW3072 Koetznor 2016-09-02T12:27:22 1.000