

Product data sheet

Item No. R1.188.2220.0

**Device for monitoring of safety-related circuits
SNV4076SL-A 3s AC 115-230V**

Base unit, single-channel or two-channel control, automatic-/ manual reset with reset switch monitoring, 3 immediate switching current paths, 3 enabling current path off-delayed not retriggerable, 0 - 3s, AC 115-230 V, screw-terminals pluggable



Item No.	R1.188.2220.0
EAN	4046521300508
Order Unit	1 Piece(s)

Certificates / Approvals

Technical data
General

Function display	5 LED, grün/rot
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire ranges screw terminals, fine-stranded / solid	1 x 0,2 mm ² - 2,5 mm ² / 2 x 0,2 mm ² - 1,0 mm ²
Wire ranges screw terminals, fine-stranded with ferrules	1 x 0,25 mm ² - 2,5 mm ² / 2 x 0,25 mm ² - 1,0 mm ²
Permissible torque min.	0.5 Nm
Permissible torque max.	0.6 Nm
Tightening moment	0.6 Nm
Weight	0.35 kg
Standards	EN ISO 13849-1EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

Connection Data

Detachable clamps	Yes
Type of electric connection	Screw connection

Application

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

Output circuit

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I ² of all current path	25 A ²
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 3A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A ² s
Mechanical life	10 ⁷ switching cycles
Outputs, signalling function, undelayed, with contact	1
Outputs, signalling function, delayed, with contact	0
Outputs, safe, undelayed, with contact	3
Outputs, safe, delayed, with contact	3

Control circuit

Response time tA1	200 ms
Response time tA2	200 ms
Min. switch-on time	100 ms
Recovery time tW	> 50 ms
Release time tR	< 20 ms
Release time tR, delayed contacts (tolerance)	0,1 - 3 s (+ 0,1 %, + 15ms)
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

Supply circuit

Nominal voltage U	AC 115-230 V
Rated consumption AC	6.3 VA
Electrical isolation supply circuit - control circuit	Yes
Min. rated control supply voltage at AC 50 Hz	98 V
Max. rated AC voltage for controls, 50 Hz	253 V
Rated control supply voltage at AC 60HZ	98 V
Rated control supply voltage at AC 50HZ	253 V

Dimensions

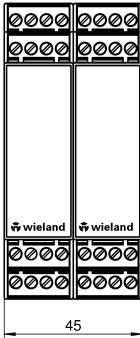
Depth	114 mm
Width	45 mm
Height	96.5 mm

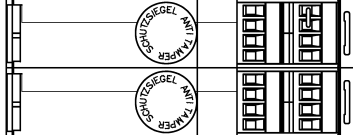
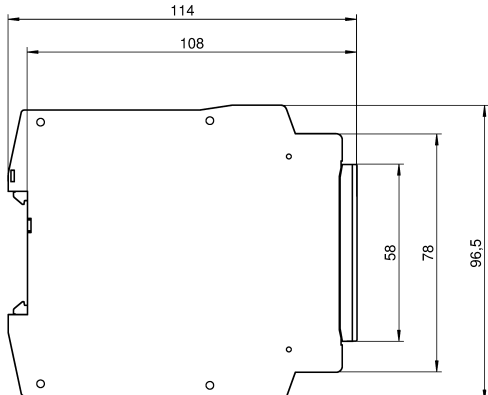
Technical drawing

04 - PRE 12/02

⊙

Teile-Nr. / Part-No.
R1.188.2040.0
R1.188.2070.0
R1.188.2100.0
R1.188.2130.0
R1.188.2160.0
R1.188.2190.0
R1.188.2220.0
R1.188.2250.0
R1.188.2280.0
R1.188.2310.0
R1.188.2340.0
R1.188.2370.0
R1.188.2470.0
R1.188.2500.0
R1.188.2530.0
R1.188.2560.0
R1.188.2590.0
R1.188.2620.0
R1.188.2650.0
R1.188.2680.0
R1.188.2710.0
R1.188.2740.0
R1.188.2770.0
R1.188.2800.0
R1.188.3120.0
R1.188.3510.0



Werte für die Abmessungen sind in mm angegeben. Die Maße sind ohne Toleranzen angegeben. Die Maße sind ohne Toleranzen angegeben. Die Maße sind ohne Toleranzen angegeben.

Weitere Angaben siehe KATALOG oder eKatalog. www.wieland-electric.com
 Additional data see CATALOG or eCatalog. eshop.wieland-electric.com

ja/yes <input type="checkbox"/> Stoffverbots- und Deklarationsliste nach NN 5020.010 ist einzuhalten. Conformity with Wieland document NN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared																										
Freiheiten nach General tolerance	<input type="checkbox"/> CAD-Zeichnung, keine manuellen Änderungen <input type="checkbox"/> CAD-Drawing, no manual modifications allowed																									
Verwendung: First Use:	Sheet: Sheet:																									
<table border="1" style="width: 100%;"> <tr> <th>Werkstoff/ Material</th> <th>2014</th> <th>Tag/ Date</th> <th>Name</th> <th>Zeichnung Nr. / Drawing No.</th> </tr> <tr> <td>Maßstab/Scale</td> <td>gezeichnet drawn</td> <td>05.06.</td> <td>Kötzner</td> <td>T R1.188.3120.0 01K</td> </tr> <tr> <td></td> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>gezeichnet drawn</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> </table>	Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.	Maßstab/Scale	gezeichnet drawn	05.06.	Kötzner	T R1.188.3120.0 01K		geprüft checked					gezeichnet drawn					geprüft checked				Maße in mm/Dimensions are in mm
Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.																						
Maßstab/Scale	gezeichnet drawn	05.06.	Kötzner	T R1.188.3120.0 01K																						
	geprüft checked																									
	gezeichnet drawn																									
	geprüft checked																									
Detail/ File: 030021_A01K_R1.188.3120.0.DCD																										
Ersetzt für/ Replacement for:																										
03.02.15 03.02.15 03.02.15	Type Benennung/ Title Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Schraubklemmen steckbar standard housing and cover, overall with 45mm plug-in pcb terminal																									

R11883120001K_1 CADW3072 Koetzner 2015-02-04T14:01:36 1.00D