

Product data sheet

Item No. R1.188.2340.0

Device for monitoring of safety-related circuits SNV4074SL-A 30s AC115-230V

Base unit, single-channel or two-channel control, automatic-/ manual reset with reset switch monitoring, 2 immediate switching current paths, 2 enabling current path off-delayed not retriggerable, 2 signalling contacts immediately, 2 signalling contacts off-delayed, 0 - 30s, AC 115-230 V, screw-terminals pluggable



Item No.	R1.188.2340.0
EAN	4046521300638
Order Unit	1 Piece(s)

Certificates / Approvals



Technical data

General

Function display	5 LED, grün/rot
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire ranges screw terminals, fine-stranded / solid	1 x 0,2 mm ² - 2,5 mm ² / 2 x 0,2 mm ² - 1,0 mm ²
Wire ranges screw terminals, fine-stranded with ferrules	1 x 0,25 mm ² - 2,5 mm ² / 2 x 0,25 mm ² - 1,0 mm ²
Permissible torque min.	0.5 Nm
Permissible torque max.	0.6 Nm
Tightening moment	0.6 Nm
Weight	0.35 kg
Standards	EN ISO 13849-1EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

Connection Data

Detachable clamps	Yes
Type of electric connection	Screw connection

Application

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

Output circuit

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I ² of all current path	25 A ²
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 3A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A ² s
Mechanical life	10 ⁷ switching cycles
Outputs, signalling function, undelayed, with contact	2
Outputs, signalling function, delayed, with contact	2
Outputs, safe, undelayed, with contact	2
Outputs, safe, delayed, with contact	2

Control circuit

Response time tA1	200 ms
Response time tA2	200 ms
Min. switch-on time	100 ms
Recovery time tW	> 50 ms
Release time tR	< 20 ms
Release time tR, delayed contacts (tolerance)	0 - 30 s (+- 0,1 %, +- 15ms)
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

Supply circuit

Nominal voltage U	AC 115-230 V
Rated consumption AC	6.3 VA
Electrical isolation supply circuit - control circuit	Yes
Min. rated control supply voltage at AC 50 Hz	98 V
Max. rated AC voltage for controls, 50 Hz	253 V
Rated control supply voltage at AC 60HZ	98 V
Rated control supply voltage at AC 50HZ	253 V

Dimensions

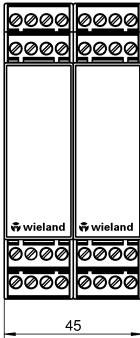
Depth	114 mm
Width	45 mm
Height	96.5 mm

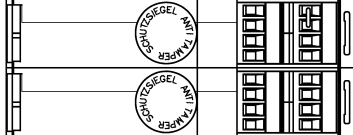
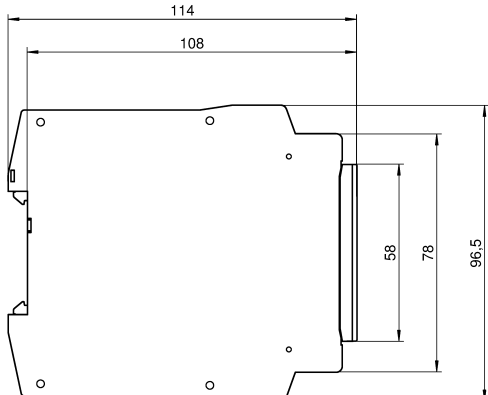
Technical drawing

04 - PRE 12/02

⊙


Teile-Nr. / Part-No.
R1.188.2040.0
R1.188.2070.0
R1.188.2100.0
R1.188.2130.0
R1.188.2160.0
R1.188.2190.0
R1.188.2220.0
R1.188.2250.0
R1.188.2280.0
R1.188.2310.0
R1.188.2340.0
R1.188.2370.0
R1.188.2470.0
R1.188.2500.0
R1.188.2530.0
R1.188.2560.0
R1.188.2590.0
R1.188.2620.0
R1.188.2650.0
R1.188.2680.0
R1.188.2710.0
R1.188.2740.0
R1.188.2770.0
R1.188.2800.0
R1.188.3120.0
R1.188.3510.0



Werte für die Abmessungen sind in mm angegeben. Die Abmessungen sind in der Regel in mm angegeben. Die Abmessungen sind in der Regel in mm angegeben.

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog. www.wieland-electric.com
eshop.wieland-electric.com

ja/yes <input type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared											
Freiheiten nach General tolerance	CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed										
Verwendung: First Use:	Sheet: Sheet:										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Werkstoff/ Material</th> <th>2014 gezeichnet drawn</th> <th>Tag/ Date</th> <th>Name</th> <th>Zeichnung Nr. / Drawing No.</th> </tr> </thead> <tbody> <tr> <td>Maßstab/Scale</td> <td>05.06.</td> <td>Költzner</td> <td></td> <td>T R1.188.3120.0 01K</td> </tr> </tbody> </table>	Werkstoff/ Material	2014 gezeichnet drawn	Tag/ Date	Name	Zeichnung Nr. / Drawing No.	Maßstab/Scale	05.06.	Költzner		T R1.188.3120.0 01K	Maße in mm/Dimensions are in mm
Werkstoff/ Material	2014 gezeichnet drawn	Tag/ Date	Name	Zeichnung Nr. / Drawing No.							
Maßstab/Scale	05.06.	Költzner		T R1.188.3120.0 01K							
Detail/ File: 030021_A01K_R1.188.3120.0.DCD											
Ersetzt für/ Replacement for:											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Index</th> <th>03.02.15</th> <th>Typ</th> <th>Benennung/ Title</th> </tr> </thead> <tbody> <tr> <td>Änderung/ Revision</td> <td></td> <td></td> <td>Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Schraubklemmen steckbar standard housing and cover, overall with 45mm plug-in pcb terminal</td> </tr> </tbody> </table>	Index	03.02.15	Typ	Benennung/ Title	Änderung/ Revision			Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Schraubklemmen steckbar standard housing and cover, overall with 45mm plug-in pcb terminal	 www.wieland-electric.com		
Index	03.02.15	Typ	Benennung/ Title								
Änderung/ Revision			Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Schraubklemmen steckbar standard housing and cover, overall with 45mm plug-in pcb terminal								

R11883120001K_1 CADW3072 Koeltzner 2015-02-04T14:01:36 1.00D

Technical changes reserved

Page 3/3