


Product data sheet

Item No. R1.188.2510.0

Device for monitoring of safety-related circuits SNV4274SL-C 30S DC 24V

Base unit, single-channel or two-channel control, automatic-/ manual reset with reset switch monitoring, 2 immediate switching current paths, 2 enabling current path off-delayed retriggerable, 2 signalling contacts immediately, 2 signalling contacts off-delayed, 0-30s, DC 24 V, push-in terminals pluggable

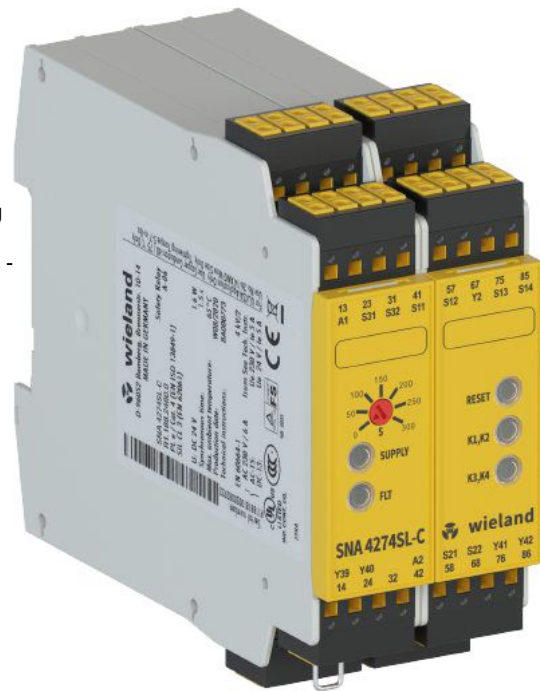

Item No.	R1.188.2510.0
EAN	4046521303851
Order Unit	1 Piece(s)

Certificates / Approvals



Technical data

General

Function display	5 LED, grün/rot
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire range cage clamp terminals	2 x 0,25mm ² - 1,5mm ²
Weight	0.33 kg
Standards	EN ISO 13849-1EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

Connection Data

Detachable clamps	Yes
Type of electric connection	Spring clamp connection

Application

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

Output circuit

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I ² of all current path	40 A ²
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 3A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A ² s
Mechanical life	10 ⁷ switching cycles
Outputs, signalling function, undelayed, with contact	2
Outputs, signalling function, delayed, with contact	2
Outputs, safe, undelayed, with contact	2
Outputs, safe, delayed, with contact	2

Control circuit

Response time tA1	200 ms
Response time tA2	200 ms
Min. switch-on time	100 ms
Recovery time tW	> 50 ms
Release time tR	< 20 ms
Release time tR, delayed contacts (tolerance)	0 - 30 s (+- 0,1 %, +- 15ms)
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

Supply circuit

Nominal voltage U	DC 24 V
Rated consumption DC	2.8 W
Electrical isolation supply circuit - control circuit	No
Min. rated DC voltage for controls	20.4 V
Max. rated DC voltage for controls	26.4 V
Min. rated control supply voltage at DC	20.4 V


Dimensions

Depth	114 mm
Width	45 mm
Height	106.5 mm

Technical drawing


00 - PRE 17/02

Teile-Nr. / Part-No.
R1.188.2050.0
R1.188.2080.0
R1.188.2110.0
R1.188.2140.0
R1.188.2170.0
R1.188.2200.0
R1.188.2230.0
R1.188.2260.0
R1.188.2290.0
R1.188.2320.0
R1.188.2350.0
R1.188.2380.0
R1.188.2480.0
R1.188.2510.0
R1.188.2540.0
R1.188.2570.0
R1.188.2600.0
R1.188.2630.0
R1.188.2660.0
R1.188.2690.0
R1.188.2720.0
R1.188.2750.0
R1.188.2780.0
R1.188.2810.0
R1.188.3540.0

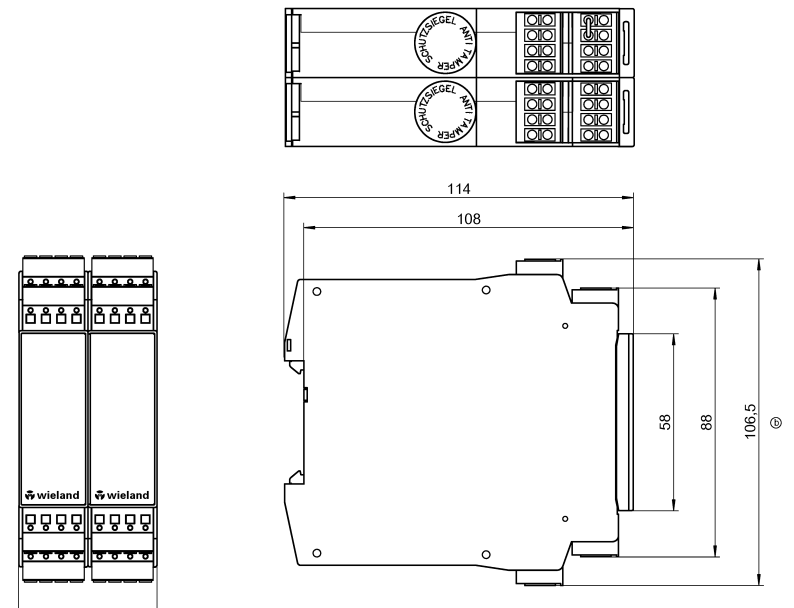

Wenn nicht anders angegeben, sind alle Maße in mm anzunehmen.
 Unless otherwise specified, all dimensions are in mm.
 Dimensionen in mm sind ohne weitere Angabe zu verstehen.

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog. www.wieland-electric.com
eshop.wieland-electric.com

ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared																															
Freioleranz nach General tolerance	CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed																														
	1. Verwendung First Use:																														
	Sheet:																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Werkstoff/ Material</th> <th>2014</th> <th>Tag/ Date</th> <th>Name</th> <th>Zeichnung Nr. / Drawing No.</th> </tr> <tr> <td> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>gezeichnet designed</td> <td>05.06.</td> <td></td> <td>Koetzner</td> <td rowspan="4" style="text-align: center; vertical-align: middle;">T R1.188.3540.0 01K</td> </tr> <tr> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> <tr> <td>gezeichnet designed</td> <td></td> <td></td> <td></td> </tr> <tr> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> </table> </td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center;">Maße in mm/Dimensions are in mm</td> </tr> </table>	Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>gezeichnet designed</td> <td>05.06.</td> <td></td> <td>Koetzner</td> <td rowspan="4" style="text-align: center; vertical-align: middle;">T R1.188.3540.0 01K</td> </tr> <tr> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> <tr> <td>gezeichnet designed</td> <td></td> <td></td> <td></td> </tr> <tr> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> </table>	gezeichnet designed	05.06.		Koetzner	T R1.188.3540.0 01K	geprüft checked				gezeichnet designed				geprüft checked							Maße in mm/Dimensions are in mm				
Werkstoff/ Material	2014	Tag/ Date	Name	Zeichnung Nr. / Drawing No.																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>gezeichnet designed</td> <td>05.06.</td> <td></td> <td>Koetzner</td> <td rowspan="4" style="text-align: center; vertical-align: middle;">T R1.188.3540.0 01K</td> </tr> <tr> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> <tr> <td>gezeichnet designed</td> <td></td> <td></td> <td></td> </tr> <tr> <td>geprüft checked</td> <td></td> <td></td> <td></td> </tr> </table>	gezeichnet designed	05.06.		Koetzner	T R1.188.3540.0 01K	geprüft checked				gezeichnet designed					geprüft checked																
gezeichnet designed	05.06.		Koetzner	T R1.188.3540.0 01K																											
geprüft checked																															
gezeichnet designed																															
geprüft checked																															
Maße in mm/Dimensions are in mm																															
Detail/ File: 036021_001K_R1.188.3540.0.DCD		Ersetzt für/ Replacement for:																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>02.09.16</td> <td></td> <td>Type</td> <td>Benennung/ Title</td> </tr> <tr> <td>05.02.15</td> <td></td> <td></td> <td>Maßbildzeichnung/dimension drawing</td> </tr> <tr> <td></td> <td></td> <td></td> <td>Standardgehäuse u. -deckel, Baubreite 45mm,</td> </tr> <tr> <td></td> <td></td> <td></td> <td>Federkraftklemme steckbar,</td> </tr> <tr> <td></td> <td></td> <td></td> <td>standard housing and cover, overall with 45mm</td> </tr> <tr> <td></td> <td></td> <td></td> <td>plug-in spring-clamp terminal</td> </tr> </table>	02.09.16		Type	Benennung/ Title	05.02.15			Maßbildzeichnung/dimension drawing				Standardgehäuse u. -deckel, Baubreite 45mm,				Federkraftklemme steckbar,				standard housing and cover, overall with 45mm				plug-in spring-clamp terminal	 www.wieland-electric.com						
02.09.16		Type	Benennung/ Title																												
05.02.15			Maßbildzeichnung/dimension drawing																												
			Standardgehäuse u. -deckel, Baubreite 45mm,																												
			Federkraftklemme steckbar,																												
			standard housing and cover, overall with 45mm																												
			plug-in spring-clamp terminal																												

R1_188_3540_001K_2 CADW3072 Koetzner 2016-09-02T12:27:22 1.000