


Product data sheet

Item No. R1.188.2690.0

Device for monitoring of safety-related circuits SNV4274SL-C 30S AC 115-230V

Base unit, single-channel or two-channel control, automatic-/ manual reset with reset switch monitoring, 2 immediate switching current paths, 2 enabling current path off-delayed retriggerable, 2 signalling contacts immediately, 2 signalling contacts off-delayed, 0-30s, AC 115-230 V, push-in terminals pluggable

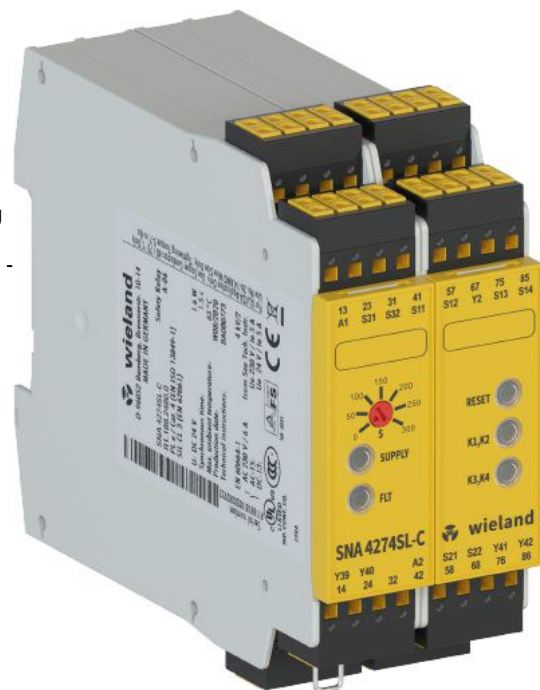

Item No.	R1.188.2690.0
EAN	4046521304032
Order Unit	1 Piece(s)

Certificates / Approvals



Technical data

General

Function display	5 LED, grün/rot
Creepage distances and clearances between the circuits	EN 60664-1
Protection degree according to DIN EN 60529 (housing)	IP40
Protection degree according to DIN EN 60529 (terminals)	IP20
Ambient temperature min.	-25 °C
Ambient temperature max.	55 °C
Wire range cage clamp terminals	2 x 0,25mm ² - 1,5mm ²
Weight	0.35 kg
Standards	EN ISO 13849-1EN 62061
Suited for safety functions	Yes
With muting function	No
Feedback circuit	Yes
Start contact	Yes
Stop category acc. to IEC 60204	1
Rail mounting possible	Yes

Connection Data

Detachable clamps	Yes
Type of electric connection	Spring clamp connection

Application

Model	Basic device
Suitable for monitoring of magnetic switches	Yes
Suitable for monitoring of proximity switches	Yes
Suitable for monitoring of emergency-stop circuits	Yes
Suitable for monitoring of optoelectronic protection equipment	Yes
Suitable for monitoring of position switches	Yes

Output circuit

Enabling paths	Normally open contact
Enabling paths, time delayed	Normally open contact, off delay
Signaling paths	Opener
Contact material	Ag-alloy, gold-plated
Rated switching voltage, enabling paths AC	230 V
Rated switching voltage, enabling paths DC	24 V
Rated switching voltage, signaling paths AC	230 V
Rated switching voltage, signaling paths DC	24 V
Max. thermal current I	6 A
Max. thermal current I	2 A
Max. total current I ² of all current path	25 A ²
Application category AC-15 (NO)	Ue 230V, Ie 3A
Application category DC-13 (NO)	Ue 24V, Ie 3A
Short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A ² s
Mechanical life	10 ⁷ switching cycles
Outputs, signalling function, undelayed, with contact	2
Outputs, signalling function, delayed, with contact	2
Outputs, safe, undelayed, with contact	2
Outputs, safe, delayed, with contact	2

Control circuit

Response time tA1	200 ms
Response time tA2	200 ms
Min. switch-on time	100 ms
Recovery time tW	> 50 ms
Release time tR	< 20 ms
Release time tR, delayed contacts (tolerance)	0 - 30 s (+- 0,1 %, +- 15ms)
Type of switch function of the inputs	Normally open contact
Evaluation inputs	2-channel

Supply circuit

Nominal voltage U	AC 115-230 V
Rated consumption AC	6.3 VA
Electrical isolation supply circuit - control circuit	Yes
Min. rated control supply voltage at AC 50 Hz	98 V
Max. rated AC voltage for controls, 50 Hz	253 V
Rated control supply voltage at AC 60HZ	98 V
Rated control supply voltage at AC 50HZ	253 V

Dimensions


Depth	114 mm
Width	45 mm
Height	106.5 mm

Technical drawing


04 - PRE 17/02

⊙


Teile-Nr. / Part-No.
R1.188.2050.0
R1.188.2080.0
R1.188.2110.0
R1.188.2140.0
R1.188.2170.0
R1.188.2200.0
R1.188.2230.0
R1.188.2260.0
R1.188.2290.0
R1.188.2320.0
R1.188.2350.0
R1.188.2380.0
R1.188.2480.0
R1.188.2510.0
R1.188.2540.0
R1.188.2570.0
R1.188.2600.0
R1.188.2630.0
R1.188.2660.0
R1.188.2690.0
R1.188.2720.0
R1.188.2750.0
R1.188.2780.0
R1.188.2810.0
R1.188.3540.0

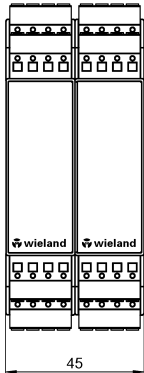

45

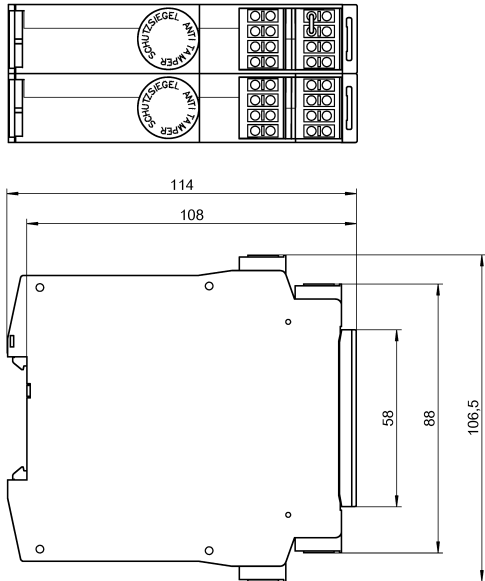

114
108

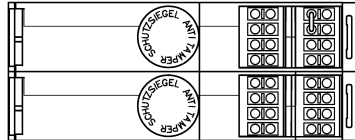

58
88
106.5 ⊙

Wenn diese Abbildungen für den Bau von Anlagen verwendet werden, ist die Verantwortung für die Einhaltung der geltenden Vorschriften und Normen beim Bau der Anlage zu übernehmen. Die Haftung für Schäden, die durch die Verwendung dieser Abbildungen entstehen, ist ausgeschlossen.

A	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
M1	M1
M2	M2
M3	M3
L	L
C	C
I	I
11.1	11.1
12.1	12.1
13.1	13.1

Weitere Angaben siehe KATALOG oder eKatalog. www.wieland-electric.com
 Additional data see CATALOG or eCatalog. esthop.wieland-electric.com

ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared	
Freioleranz nach General tolerance	CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed
Verwendung: First Use:	Blatt: Sheet:
Werkstoff/ Material Material/Spec	2014 gezeichnet drawn 05.06. Koetznner Name Zeichnung Nr. / Drawing No. T R1.188.3540.0 01K
Maße in mm/Dimensions are in mm	
Datei/ File: 036021_001K_R1.188.3540.0.DCD Ersetzt für/ Replacement for:	
02.09.16 03.02.15 Index	Type Benennung/ Title Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 45mm, Federkraftklemme steckbar, standard housing and cover, overall with 45mm plug-in spring-clamp terminal

R1_188_3540_001K_2 CADW3072 Koetznner 2016-09-02T12:27:22 1.000